

**PKCAMPDB**

Campus Series Architectural LED Light Pole Kit Direct Burial

Job: _____

Job Site: _____

State: _____

Client Name: _____

Notes: _____

Approvals: _____

Date: _____

LED Light Pole Kit Includes:

4" Round Straight Aluminum Light Pole, Architectural Post-Top LED Area Light, Tenon, Hardware.

Light Pole:

Pole Shaft: 4 inch round straight aluminum with 0.125" wall thickness.

Seamlessly extruded from 6063-T6 alloy.

Pole Height: Standard above grade pole height is 16 ft.

Optional heights are 14, 12, 10. Custom heights are also available.

Handhole: 2-1/2" X 4" size handhole is located at 18 inches from the base.

An aluminum handhole cover with 2 screws is provided.

A ground lug with set screw is located near the handhole opening for proper grounding of the pole.

Color: Black, Bronze, White, Gray.

Embedment: Embedment length is 4 ft. for 16 ft above-grade poles. All the others have 3 ft. embedment length. A 1-3/4" X 5 3/4" size slotted opening is provided 18 inches from the ground line for conduit entry.

Foundation design: Foundation should be designed by an engineer familiar with local soil and wind conditions as well as local code where the pole(s) will be installed.

LED Fixture:

Material: Rugged die-cast aluminum housing.

Optical System: High performance LED optical system delivers industry leading optical performance and visual comfort. Diffused lens option provides maximum visual comfort with reduced brightness and LED pixelization.

Color Temperature: 5000K, 4000K and 3000K

Distribution: Type 3 and 5

Voltage: 120-277 Volt, 347-480 Volt (optional).

Dimming: 0-10V Dimming Control (optional).

Bluetooth: Fully customizable wireless control system (optional).

Photocell: Twist/Lock photocell (optional).

UL Listing: UL Listed for Wet Locations.

DLC Listing: DLC Premium.


IP Rating: IP66

Housing Color: Black, Bronze, White, Gray.

Weight: 25 lbs

Warranty: 5 Years

Item #	Watt	Lumens
PKCAMP40DB	41	6,000
PKCAMP70DB	70	10,000
PKCAMP100DB	100	14,000

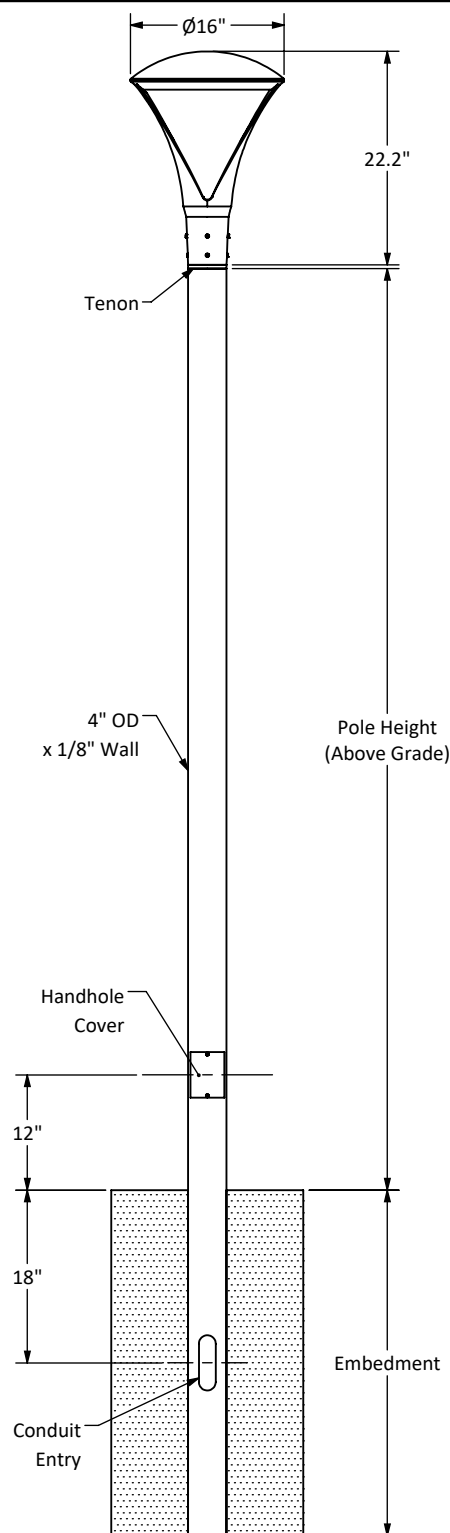

Disclaimer: All dimensions and specifications are subject to change without any notice. Energy Light, Inc. is not responsible for any claims arising from improper loading (what is attached to the light pole), improper use, incorrect foundation design and/or installation.