

Albeo™ LED Luminaire

Heavy Industrial Low Bay Lighting (ALR1 - Series)



Project name _____
Date _____
Type _____

Product Description:

The Albeo™ ALR1-series LED luminaire is an energy-efficient, low maintenance alternative to traditional fluorescent in a variety of commercial, low bay lighting applications. The ALR1 expands the linear product offering to include IP65 rated fixtures for demanding industrial environments.

Applications:

- Designed to meet recommended luminance and illuminance requirements for low bay and task level applications in commercial, industrial, warehouse, office, education, health, retail and data center settings.
- Certified for IP 65.
- Recommended for low bay lighting applications at 20 feet or lower.

Housing:

- Fiberglass housing with diffuser.

LED & Optical Assembly:



- Precision lens system provides optimized illumination for open floor plan.
- Utilizes high brightness LEDs, 70 CRI at 4000K & 5000K typical.
- LM-79, LM-80 tests and reports are performed in accordance to IESNA standards.
- Directional LEDs put light where it is needed without reflectors to greatly increase efficiency.

Ratings:


- DLC qualified. Please refer to: <http://www.designlights.org/QPL> for complete information.
- /6 UL 1598 Suitable for Wet Locations.
- /6 UL 8750 LED equipment in Lighting Products.
- Temperature Rated at -30°C up to 45°C (-22°F up to 113°F)
- Projected L70 (10k) ≥ 100,000 Life Hours per IES TM-21.
- RoHS

Product Dimensions:

4 Ft.

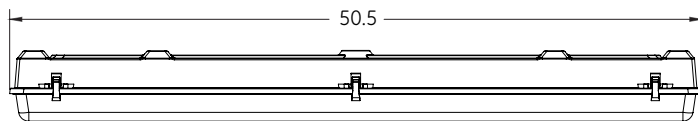

8 Ft.



Mounting:

- Surface Mount
- Chain

Finish:

- White

Controls:

- IP 66 rated motion sensors

Electrical:

- 120-277 volt and 347-480 volt available.
- System power factor is >90%* and THD <20%*.
- Internal Surge Protection
- EMI: Title 47 CFR 15 Class A

* System power factor and THD is tested and specified at 120V input and maximum load conditions.

Warranty:

- 5-year limited system warranty standard


Ordering Number Logic

Heavy Industrial Low Bay Lighting (ALR1)



ALR1 - 1 - 1 - S - ST - N - W

PRODUCT ID	VOLTAGE	MODULE	DRIVE CURRENT	LED COLOR TEMP	OPTICS BEAM	FIXTURE LENGTH	FIXTURE TYPE	MOTION/DAYLIGHT SENSOR	CONTROL WIRING	MOUNTING	CORD	PLUG	FINISH
A = Albeo L = Linear R = Rugged Series 1 = LED Generation	0 = 120V-277V 1 = 120V 2 = 208V 4 = 277V 5 = 480V D = 347V	1 = 1 module	T = Standard H = High Output V = Very High Output	70 Plus CRI 47 = 4000K 57 = 5000K	1 = 120°	4 = 4 ft 8 = 8 ft	S = Stand Alone	N = None V = Motion, 360° W = Motion, Aisle* X = Daylight T = Wireless ZigBee Daintree™ Enabled (No Sensor, 120-277V only) * Field-installed sticker included. Note: All sensors are IP66 rated. 0-10V dimming sensors are not compatible with 480V option.	N = None V = 0-10V Dimming* * Note: 2-conductor cord for dimming is factory installed. See images below.	ST = Standard, Chain & Surface Mount ready. See Mounting & Accessories	K = Knock out access plug A = 6 ft. 18-3 cord B = 12 ft. 18-3 cord	N = None	W = White

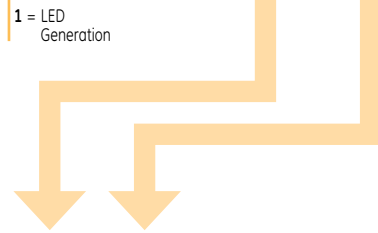


70 CRI

MODULE #	DRIVE CURRENT	FIXTURE LENGTH	TYPICAL INITIAL LUMENS 70 CRI	TYPICAL SYSTEM WATTS			LPW 4000K & 5000K			MAXIMUM AMBIENT TEMPERATURE
			4000K & 5000K	120-277V	347V	480V	120-277V	347V	480V	
1	T	4	3350	23	27	30	146	124	112	45° C
1	H	4	5350	38	41	45	141	130	119	45° C
1	V	4	7350	55	58	59	134	127	125	45° C
1	T	8	6300	41	45	48	154	140	131	45° C
1	H	8	10700	75	79	81	143	135	132	40° C
1	V	8	14800	111	117	117	133	126	126	35° C


OPTICS BEAM	% OUTPUT
120° CLEAR	100%

MODULE CONFIGURATION	MAX WEIGHT
4 Ft. 120-277V	8 lbs. max
4 Ft. 347/480V	11 lbs. max
8 Ft. 120-277V	16 lbs. max
8 Ft. 347/480V	19 lbs. max

Dimming

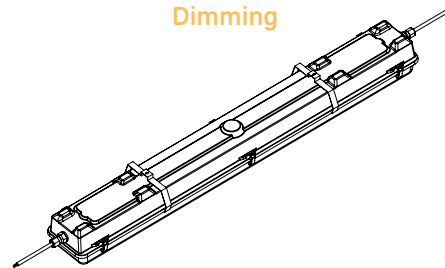

No Dimming

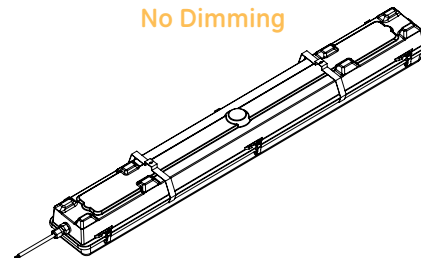

current
powered by GE

All trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. Current, powered by GE is a business of the General Electric Company. © 2017 GE.

