


**25 foot aluminum street light pole with 8 foot davit arm. 6 inch shaft base with 0.188" wall thickness. Part #: 25A6RT1881D8**

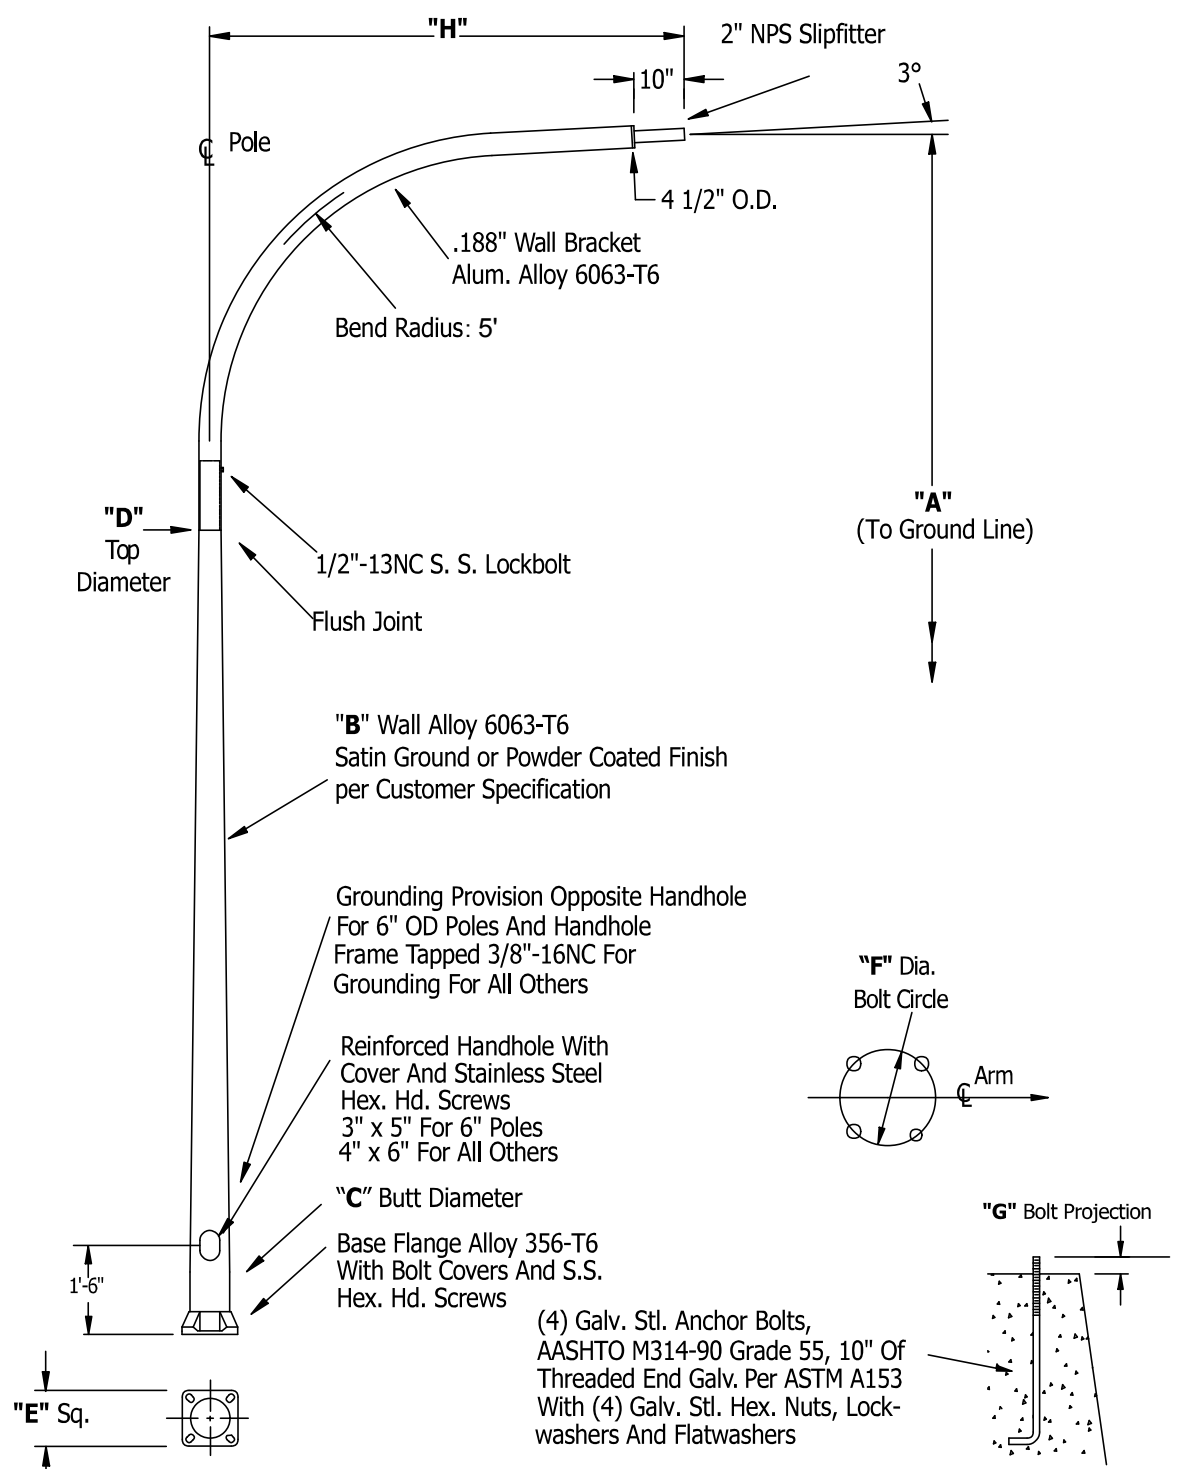

<b>A</b>	<b>Mounting Height:</b>	25 ft
<b>B</b>	<b>Wall Thickness:</b>	.188 in
<b>C</b>	<b>Butt Diameter:</b>	6 in
<b>D</b>	<b>Top Diameter:</b>	4.5 in
<b>E</b>	<b>Base Diameter:</b>	9.75 in
<b>F</b>	<b>Bolt Circle:</b>	9-10 in
<b>G</b>	<b>Bolt Projection:</b>	2.75 in
	<b>Bolt Size:</b>	1 x 36 x 4
	<b>Net Weight:</b>	119
	<b>Luminary Weight:</b>	75
<b>H</b>	<b>Arm Length:</b>	8
	<b>Bend Radius:</b>	5'

*Maximum EPA*

<b>70 MPH:</b>	6.9
<b>80 MPH:</b>	4.4
<b>90 MPH:</b>	2.7
<b>100 MPH:</b>	1.9
<b>110 MPH:</b>	1.3

(4) Galv. Stl. Anchor Bolts, AASHTO M314-90 Grade 55, 10" Of Threaded End Galv. Per ASTM A153 With (4) Galv. Stl. Hex. Nuts, Lockwashers And Flatwashers