


**25 foot aluminum street light pole with 10 foot davit arm. 8 inch shaft base with 0.156" wall thickness. Part #: 25A8RT1561D10**

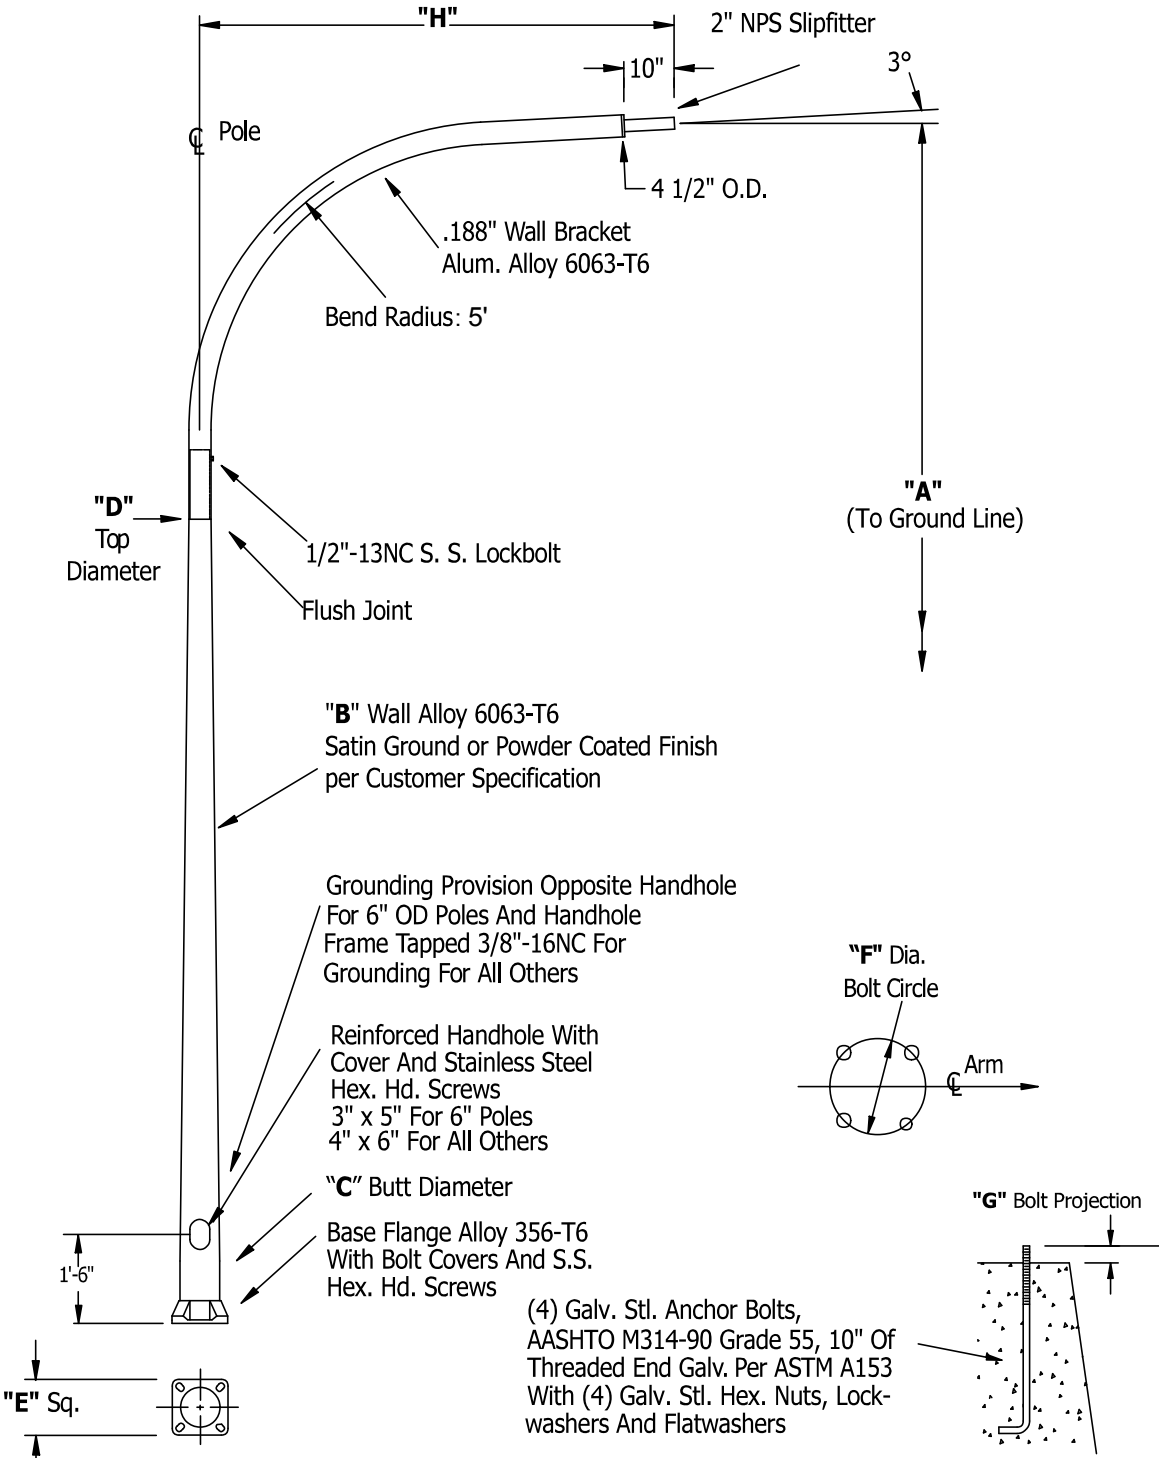

<b>A</b>	<b>Mounting Height:</b>	25 ft
<b>B</b>	<b>Wall Thickness:</b>	.156 in
<b>C</b>	<b>Butt Diameter:</b>	8 in
<b>D</b>	<b>Top Diameter:</b>	4.5 in
<b>E</b>	<b>Base Diameter:</b>	11.25 in
<b>F</b>	<b>Bolt Circle:</b>	11-12 in
<b>G</b>	<b>Bolt Projection:</b>	2.75 in
	<b>Bolt Size:</b>	1 x 36 x 4
	<b>Net Weight:</b>	125
	<b>Luminary Weight:</b>	75
<b>H</b>	<b>Arm Length:</b>	10
	<b>Bend Radius:</b>	5'

*Maximum EPA*

<b>70 MPH:</b>	11.2
<b>80 MPH:</b>	8.4
<b>90 MPH:</b>	6.2
<b>100 MPH:</b>	4.7
<b>110 MPH:</b>	3.5

(4) Galv. Stl. Anchor Bolts, AASHTO M314-90 Grade 55, 10" Of Threaded End Galv. Per ASTM A153 With (4) Galv. Stl. Hex. Nuts, Lockwashers And Flatwashers